
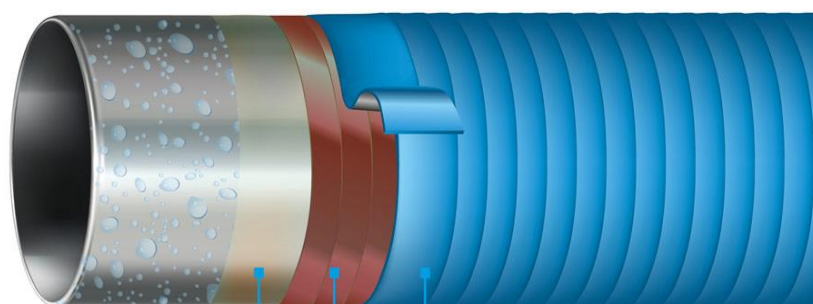


# VivaxCoat®-MT

## Product information



AQ Primer

Tape MT

AS50

### Special advantages:



Fulfills class HR und THR in accordance with SG 0130-01 of GRTgaz France.



Service temperature  
-40°C to +60°C (-40°F to +140°F).



Easy application, without special pre-treatment, on moist surfaces.



Coating of pipes in operation possible.



Solvent-free.



Very good resistance against salt containing atmospheres and soils.

## Coating system for a permanent corrosion prevention of steel pipes, armatures in new building and rehabilitation.

For a century now, DENSO Group Germany has been representing experience, quality and reliability for corrosion prevention and sealing technology. The success of the internationally leading corporation is based on the development of the "DENSO-Tape", which was already patented in 1927 as the first product worldwide for the passive corrosion prevention of pipelines. Since then, the DENSO Group Germany has been establishing and guaranteeing the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees continuously implement safe and individual solutions in a personal cooperation with the customer.

### Description

**VivaxCoat®-MT** is a durable corrosion protection system which has been specifically designed for use on **moist substrates**.

Moist surfaces often pose a particular challenge, particularly for the rehabilitation of old pipeline coatings. The unique combination of a modified, petrolatum-based corrosion protection tape with a PE/butyl rubber tape opens up new and efficient options for pipeline rehabilitation.

Even a **layer of condensation**, which precludes the application of conventional field coating systems, does not prevent **VivaxCoat®-MT** from working effectively.

Such **moist surfaces** can be found, for example, on pipelines that are under load or which are exposed to high humidity.

Pipeline downtimes or long waiting times during the coating work will be prevented and **costs significantly reduced** by using **VivaxCoat®-MT**.

**VivaxCoat®-MT** is especially suitable for permanent corrosion prevention of pipelines installed in the soil, armatures and flanges with permanent operating temperatures up to +60°C (+140°F). The system fulfills the requirements of SG 0130-01 of GRTgaz (France) for the classes HR and THR.

The corrosion prevention system **VivaxCoat®-MT** consists of the coating mastic **DENSO®-AQ Primer**, the corrosion prevention tape **DENSO®-Tape MT** as well as **DENSOLEN®-AS50** the mechanical protective tape.

**DENSO®-AQ Primer** permits an easy coating of metallic pipelines and armatures, manually or with a putty knife. A special formulation permits the outstanding wetting even for moist substrates.

**DENSO®-Tape MT** is a corrosion prevention tape that can be easily processed; it is based on petrolatum with a robust inner made from polypropylene nonwoven. Due to its special design, it combines perfectly with the mechanical protective tape.

**DENSOLEN®-AS50** creates an extremely resistant mechanical encasement around the corrosion prevention coating. Spirally wrapped, it amalgamates with itself and forms a closed hose. Due to the strong connection between the corrosion prevention tape and the mechanical protective tape, a very compact and stable overall system is achieved.

## Typical product properties

Property	Unit	Typical value		Test method
Priming-Paste	-	DENSO®-AQ-Primer		
Corrosion prevention tape	-	DENSO®-Tape MT (2 Layers)		
Mechanical protection tape	-	DENSOLEN®-AS50 (2 Layers)	DENSOLEN®-AS50 (3 Layers)	
Service temperature	°C (°F)	-40 to +60 (-40 to +140)		-
Dripping point DENSO®-AQ Primer	°C (°F)	>+100 (>+212)		ISO 21809-3
Dripping point DENSO®-Tape MT	°C (°F)	ca. +80 (ca. +176)		ISO 21809-3
Thickness (system)	mm	≥ 5,9	≥ 7,0	ISO 21809-3
Indentation resistance +23°C (+73,4°F) (Remaining layer thickness) (3 days, 10MPa)	mm	≥3,0	≥ 5,0	ISO 21809-3
Impact resistance	J	≥15	≥20	ISO 21809-3
Specific electrical insulation resistance* RS100 RS100/RS70	Ωm²	>10 <sup>8</sup> >0,8	>10 <sup>8</sup> >0,8	ISO 21809-3
Peel strength on pipe surface +23°C (+73,4°F)	-	Cohesive separation pattern	Cohesive separation pattern	ISO 21809-3
Peel strength on PE factory coating +23°C (+73,4°F)	-	Cohesive separation pattern	Cohesive separation pattern	ISO 21809-3
Peel strength on steel after thermal aging (28d @+30°C / 86°F) (+23°C / +73,4°F)	-	Cohesive separation pattern	Cohesive separation pattern	ISO 21809-3
Cathodic disbondment resistance 28 days, +23°C(+73,4°F) (radius)	mm	≤ 9		ISO 21809-3

\*Valid for entire system

## Ordering information and packaging

### DENSO®-AQ Primer:

Product	Dimension
DENSO®-AQ Primer	Plastic bucket fill quantity 10 Kg

### DENSO®-Tape MT:

Width (mm)	Length (m)	Rolls per box	m² per box	Total tape length per box
50	10	12	6	120
100	10	6	6	60
150	10	5	7,5	50

Additional dimension available on request.

### DENSOLEN®-AS50

	Core diameter (mm)	Width (mm)	Tape length (m)	Tape area per roll (m²)	Number of rolls	Content per box		
						Total tape area (m²)	Total tape length (m)	App. weight (kg)
DENSOLEN®-AS50	41	30	10	0.3	18	5.4	180	9.5
		50	10	0.5	12	6	120	9.5
		100	10	1.0	6	6	60	8
		150	10	1.5	6	9	180	12
	78	100	50	5	3	15	150	18.5
		150	50	7.5	2	15	100	18.5

Additional dimension available on request.

## Storage

When stored in its original, unopened packaging, **VivaxCoat®-MT** can be stored for at least 60 months after the manufacturing date.

Storage temperature: ≤ +40°C (+104°F)

The product must be stored dry, without load on the front surface.

## DENSO GmbH

Felderstrasse 24 | 51371 Leverkusen | Germany  
Phone: +49 214 2602-0 | [info@denso-group.com](mailto:info@denso-group.com)  
[www.denso-group.com](http://www.denso-group.com)

Our product information, application recommendations and other printed publications provide advice to the best of our knowledge and indicate our level of knowledge at the time of printing. The content is not legally binding. Therefore, no liability is assumed for incorrect and missing advice. The applicator is obliged to check the suitability and possibility of application for the intended purpose. Unless otherwise specified, all of the brands named are trademarks of DENSO, at least registered in Germany, which are protected by law.

Only our general terms and conditions of sale, which you will find at [www.denso-group.com](http://www.denso-group.com), apply. This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation, the German text of the respective German product information, which is available at [www.denso-group.com](http://www.denso-group.com), shall be decisive. The legal relationship shall be governed by German law.

05.2021